

Mag-13[®]


Three-Axis Magnetic Field Sensors





Mag-13® Three-Axis Magnetic Field Sensors

The Mag-13 range of sensors provide high precision measurements of static and alternating magnetic fields. Different combinations of noise level, measuring range, and a range of enclosures, make the sensors suitable for use in many applications. These include defence, physics, geophysics, bioelectromagnetics and mineral exploration.

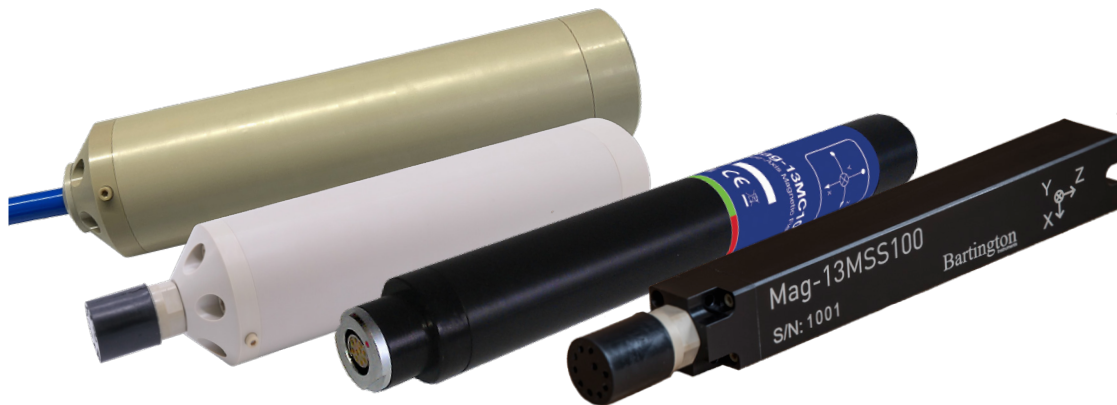

Bartington® is a registered trade mark of Bartington Holdings Limited in the following territories: Australia, Brazil, Canada, Chile, China, European Union, Hong Kong, Iceland, India, Israel, Japan, Malaysia, Mexico, New Zealand, Norway, Russia, Singapore, South Africa, South Korea, Switzerland, Taiwan, Turkey, United Kingdom, United States of America, and Vietnam.

Bartington® is used under licence by Bartington Instruments Limited.

Mag-13® is a registered trade mark of Bartington Holdings Limited in the following territories: European Union, United Kingdom, and United States of America.

Features

- Wide range of enclosures; unpackaged and submersible versions available
- Noise levels down to $<5\text{pTrms}/\sqrt{\text{Hz}}$ at 1Hz
- Measuring ranges from $\pm 70\mu\text{T}$ to $\pm 1000\mu\text{T}$
- Bandwidth of up to 3kHz
- Environmentally sealed and shielded from electrical interference

Typical Applications

- Magnetic field monitoring
- Use as feedback sensors in active magnetic field cancellation systems
- Magnetic signature measurements
- Electromagnetic surveys



Product Identification

Product name	Package	Noise	Range
Mag-13	MC = Circular enclosure MS = Square enclosure MCD = Deep submersible circular enclosure MCDDT = Deep submersible circular enclosure with potted cable tail and connector MCDDFL = Deep submersible circular enclosure with potted cable tail U = Unpackaged U-TPU = Unpackaged 2-part MSS = Submersible square enclosure	No code = Standard noise L = Low noise Q = Very low noise	70 = $\pm 70\mu\text{T}$ 100 = $\pm 100\mu\text{T}$ 250 = $\pm 250\mu\text{T}$ 500 = $\pm 500\mu\text{T}$ 1000 = $\pm 1000\mu\text{T}$

Example: Mag-13U-TPUL100 = A low noise unpackaged 2-part Mag-13 with a measuring range of $\pm 100\mu\text{T}$.

Sensors with ranges $\geq 250\mu\text{T}$ are only available in standard noise option.



Specifications

Performance					
Number of axes	Three				
Polarity	+ve when pointing North				
Full Scale Measuring Ranges	±70μT	±100μT	±250μT	±500μT	±1000μT
Scaling	143mV/μT	100mV/μT	40mV/μT	20mV/μT	10mV/μT
Scaling error	±0.5%				
Scaling Temperature Coefficient	<±60ppm				
Linearity error	0.0015% (least squares fit)				
Frequency response at 50μT peak	DC to 1kHz (±5%)				
Max Bandwidth at 50μT peak	3400Hz	3100Hz	3000Hz	3000Hz	3000Hz
Max Bandwidth at full scale	3000Hz	2500Hz	1100Hz	700Hz	300Hz
Primary Resistance	10Ω ±1.5Ω				
Primary Inductance	1000μH typical				
Secondary Resistance	36Ω ±4Ω				
Secondary Inductance	5600μH typical				
Noise: Standard Low noise (L) Very low noise (Q)	≤10pT rms / √Hz @1Hz <6pT rms / √Hz @1Hz (70 and 100μT range only) <5pTrms/√Hz at 1Hz (70 and 100μT range only)				
Zero Field Offset	≤±30nT			≤±40nT	≤±50nT
Offset Temperature Coefficient	≤±0.6nT/°C			≤±1nT/°C	
Perming (Magnetisation Hysteresis)	<2nT (at 1 x Full-scale, when powered)				
Orthogonality error between axes	<±0.1° (<±0.2° for MCD and MCDFL)				
Alignment to datum face/s	<±0.1° (Mag-13MS only)				
Excitation Breakthrough	<5mV pk-pk 15.625kHz typical				
Start-up/Settling time	<100ms				
Warm-up drift time	15 minutes to meet specifications for scaling <60 minutes to meet specifications for noise				

Mag-13® Three-Axis Magnetic Field Sensors

Electrical	
Supply Voltage	±12 to 17V
Current Consumption – Positive	35 to 41mA in zero-field
Current Consumption – Negative	13 to 17mA in zero-field
Power Supply Rejection Ratio	120dB
Power-on Surge	+90mA, -25mA, 20ms
Analogue Output	±10V
Output Impedance	10Ω
Test function field in each axis	-1μT ±10%
Maximum cable length @ 12V supply	70μT = 1000m 100μT = 1000m 250μT = 800m 500μT = 650m 1000μT = 500m
Maximum cable length @ 14V supply	70μT to 500μT = 1500m 1000μT = 1100m
Cable Length Note	Higher supply voltages will allow longer cable lengths to be used, dependant on cable resistance and magnetometer range.

Environmental	
Operating temperature range	-40 to +70°C
Storage temperature range	-40 to +70°C
Compliance (CE, etc.)	EMC BS EN 61326 & RoHS
Additional environmental qualifications	Mag-13MCD 550bar hydrostatic pressure test
Environmental protection / sealing	
MC	IP67
MS	IP67
MCD	IP68 (5000m)
MCDFL	IP68 (500m)
U	N/A (unpackaged)
U-TPU	N/A (unpackaged)
MSS	IP68 (200m)

Mechanical

Package options	Mag-13MC	Mag-13MS	Mag-13MSS	Mag-13MCD	Mag-13 MCDFL	Mag-13 MCDT	Mag-13U	Mag-13 U-TPU
Dimensions	Ø 25.4 x 203mm	32 x 32 x 203mm	30 x 30 x 251mm	Ø 60 x 301mm	Ø60 x 264mm	Ø60 x 264mm	Ø 23.2 x 150mm	Probe: Ø23.2 x 43mm Electronics: 19.5 x 129mm Harness length max 5m
Weight	82.5g	222.6g	300g	950g	950g	950g	23.5g	157g (max cable length)
Enclosure material	Acetal & PEEK	Acetal	Acetal	PEEK	PEEK	PEEK	N/A	N/A
Connector	Fischer AL-1731-DEU-1031-A010-SR-11-11-G-12	SubConn MCBH10F-NM (under-water mateable)	SubConn MCBH10F (under-water mateable)	MacArtney Type 4622C Cable	MacArtney Type MCOM10F	Molex 53047-0810	Molex 53047-0810	Molex 53047-0810
Mating connector	Fischer AL1731-S-1031-A010SR11-11 with E3-1031.2/6.2	SubConn MCOM10M or MCIL10M (underwater mateable)	N/A	SubConn MCOM10M	Molex Picoblade 51021-0800	Molex Picoblade 51021-0800	Molex Picoblade 51021-0800	Molex Picoblade 51021-0800

MTBF

MTBF – MIL-HDBK-217F:

Ground Fixed - 70°C

Ground Fixed - 50°C

Ground Benign - 70°C

Ground Benign - 50°C

60,000 hours

86,000 hours

95,000 hours

157,000 hours

Mating Connectors

Mating connectors for the Mag-13MC and Mag-13MS models are supplied free of charge. Submersible mating connectors are not supplied.

Cables

The standard cable length is 5m; alternative lengths are available on request.

All cables are terminated with a Hirose RM15TPD10S, suitable for connection to Bartington Instruments' range of data acquisition and power supply units.



Mag-13MC, Mag-13MS	
Conductors	7/0.2 PVC insulated conductors, overall braided screen and PVC sheath
Type no.	7-2-8C Black to Def Stan 61-12, part 4
Conductor resistance	0.092Ω/m
Max cable length	600m
Capacitance	100pF/m core to core 170pF/m core to screen

Mag-13MCD, Mag-13MSS submersible cable	
Conductors	8 conductors, 3x shielded twisted pairs, 2x untwisted, overall foil screen and polyurethane sheath
Conductor resistance	20.5Ω/km at 20°C
Max cable length	1500m
Weight	0.2kg/m (in air) 0.075kg/m (in seawater)
Cable bending radius	95mm (static) 130mm (dynamic)

Mag-13MCDFL, Mag-13MCDT submersible cable	
Conductors	14 conductors, 5x shielded twisted pairs, 1x jacketed shielded twisted pair, 2x untwisted conductors (not used), overall braided screen and polyurethane sheath
Conductor resistance	88.2Ω/km at 20°C
Weight	0.204kg/m (in air) 0.088kg/m (in seawater)
Cable bending radius	80mm (static) 120mm (dynamic)
Max cable length	300m

Compatibility

The Mag-13 range is compatible with the following data acquisition and power supply units from Bartington Instruments.


- PSU1 Power Supply Unit
- Magmeter-2 Power Supply and Display Unit
- Spectramag-6 Data Acquisition Unit
- SCU1 Signal Conditioning Unit
- Decaport Analogue Interface Module
- DAS1 Data Acquisition System
- DecaPSU Power Supply Unit

(Outputs for the test coil are presently only available with the DecaPSU).

Mounting Accessories

A range of mounting accessories is available.

Specification	
Mag-BR	Mounting bracket for use with the Mag-13MC
Mag-T	Tripod
Mag-TA	Tripod adaptor
Mag-LP	Levelling platform for use with the Mag-T, Mag-TA and Mag-MR
Mag-MR	Mounting rack for the installation of Mag-LP and Mag-13 sensors, available in lengths of 1 metre and multiples

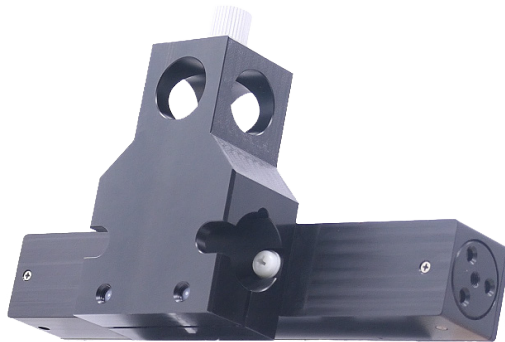



The specifications of the products described in this brochure are subject to change without prior notice.

Bartington Instruments Ltd
5, 8, 10, 11, 12 & 16 Thorney Leys Business Park
Witney, Oxford OX28 4GE. England

Telephone: +44 (0)1993 706565
Email: sales@bartington.com

 **Bartington**[®]
Instruments