


MICRO ENCODER


SPECIFICATIONS	06 SERIES	09 SERIES
• Power Supply	DC 5V±10%	DC 5V±10%
• Current Consumption	30 mA or less	40mA or less
• Signal Detection Code	Incremental	Incremental
• Resolutions (pulse/revolution)	100, 200, 300, 360	300,500,1000
• Output Phase	AB type (2 channels) with index (Z)	AB type (2 channels) with index (Z)
• Output Signal	Square wave, open collector output	Square wave, voltage output, open collector output
• Sinking Current	4mA MAX	20mA MAX
• Max. Frequent Response	100 KHz	100 KHz
• Phase Difference	T/4±T/8	T/4±T/8
• Rise and Fall Time	2 μs or less	2μs or less
• Starting Torque	0.3x10 ⁻³ N·m (3gf·cm) or less	1.0x10 ⁻³ N·m (10gf·cm) or less
• Shaft Loading	Thrust axial 1.9N (200g)	Thrust axial 1.9N (200g): resolution range 32 to 500 0.98N (100g): resolution 1000
	Radial 0.98N (100g)	Radial 1.9N (200g): resolution range 32 to 500 0.98N (100g): resolution 1000
• Shaft Revolution	6000 rpm	6000 rpm
• Operating Temperature	0°C~60°C	0°C~60°C
• Storage Temperature	-20°C~80°C	-20°C~80°C
• Humidity	RH 90% or less, no condensation	RH 90% or less, no condensation
• Vibration	Endurance: 55 Hz, double amplitude 1.5 mm, 2 hours in X, Y and Z directions, respectively	Endurance: 55 Hz, double amplitude 1.5 mm, 2 hours in X, Y and Z directions, respectively
• Shock	Endurance: 500 m/s ² (about 50G), 3 times in X, Y and Z directions, respectively	Endurance: 500 m/s ² (about 50G), 3 times in X, Y and Z directions, respectively
• Weight	5g	10g

06 SERIES

Output Waveform

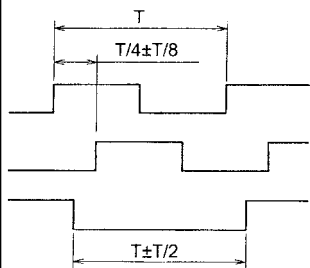


Appearance

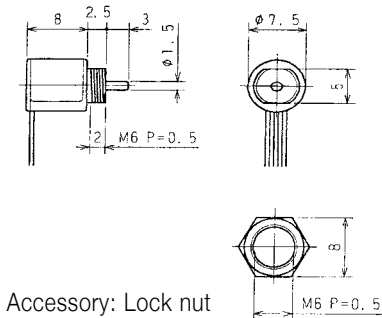


Accessory: Lock nut

09 SERIES

Output Waveform

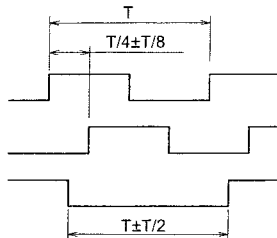

Appearance

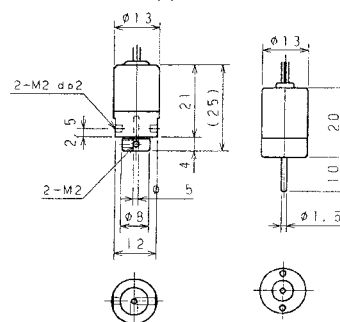

Hollow Shaft Type Shaft Type



Boston US Headquarters

247 Lynnfield Street
Peabody, MA 01960

California Sales Office
333 W. San Carlos Street, Suite 1070
San Jose, CA 95110

New York Sales Office

100 Motor Parkway, Suite #116
Hauppauge, NY 11788

Chicago Sales Office

137 N. Oak Park Ave., Suite 410
Oak Park, IL 60301

“HarmonicDrive®” is a trademark of Harmonic Drive Systems Inc. The academic or general nomenclature of our products HarmonicDrive® is strain wave gearing.

All specifications and dimensions in this manual subject to change without notice
This manual is correct as of July 2026.